


MCV - MCH - MCHZ

Multi-stage pumps

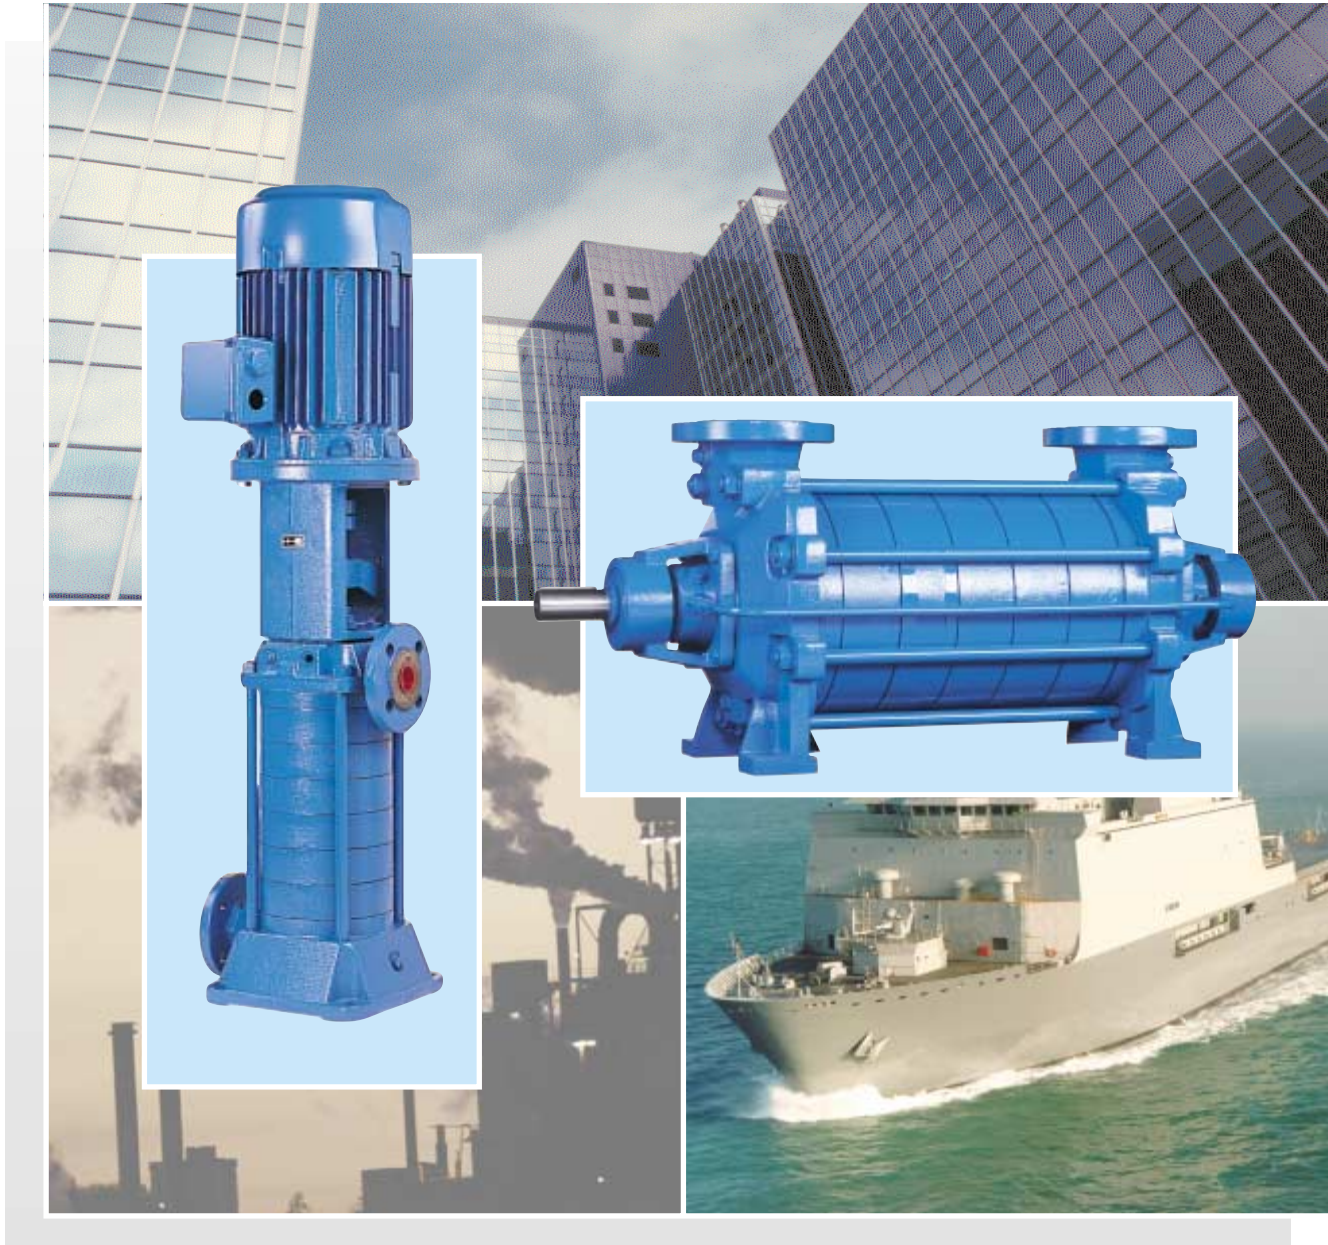

You can put pressure on them!

*We offer you a range of reliable high-pressure multistage pumps. It includes a series of horizontal pumps, **MCH** and a series of vertical pumps, **MCV**. The horizontal types can also be supplied in a self-priming version, **MCHZ**.*

The pumps consist of an inlet and outlet casing and a number of stages in between them. Each basic type is designed with a number of pressure stages. A pressure stage consists of radial diffusor channels and a matching impeller.

Flange dimensions, bolt circle and number of holes are according DIN 2535 ND 40.


The horizontal pumps are driven by a standard IEC foot motor. The vertical pumps are driven by a standard IEC flange motor, which is connected to the lantern piece of the pump. A fitting edge ensures that alignment is not required. For all pumps the power is transmitted through a flexible coupling.

Due to the modular design there is a high level of interchangeability of parts between the multi-stage pump types.

Shaft sealing options available are mechanical seals as well as gland packing.



Multi-stage pump types

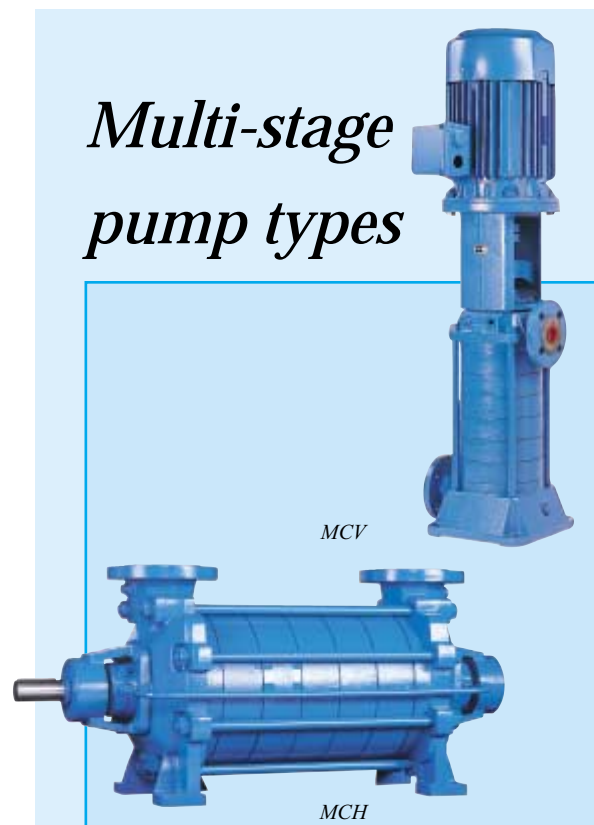

Typical characteristics

- Rigid, reliable construction
- Available in cast iron and bronze
- High pump efficiency
- Suitable for a wide range of duties
- Low maintenance cost
- Including a self-priming version
- Shaft sealing by means of mechanical seal or gland packing

Proven quality all over the place!



■ Utility

Multistage pumps are used for pressure booster sets for water supply in high rise buildings. They are used for sinking piles by water injection on building projects. Other main duties comprise fire fighting units.

■ General industry

In general industry typical applications are pumping of condensate and boiler feeding, circulation of hot water or cooling water.

■ Shipbuilding


Multistage pumps can handle fresh water as well as sea water, both clean and slightly contaminated. Their compact, space saving build makes them ideal pumps for engine rooms and general duties.



Features and *benefits*

Bearing housing

- fitted with 2 apertures
- *easy accessible gland housing*

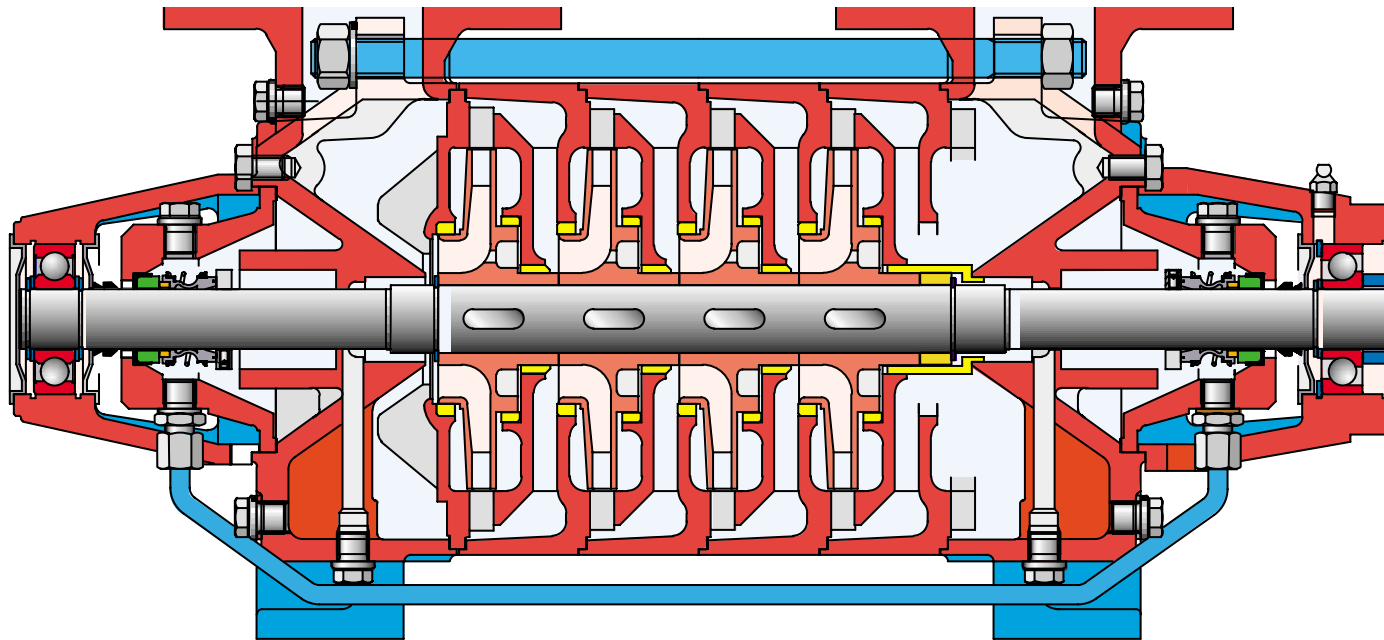

MCH

MCH feet


- pump casing support in vertical centre line with flange and piping
- *optimal distribution of forces*

MCHZ Self-priming section

- contains a built-in vacuum pump
- operates according to the liquid ring principle
- *always ready for immediate duty*
- *good air and gas handling, discharged immediately via the pressure pipe*

Wearings

- on all stages casing wearings are applied
- *increased maintainability*

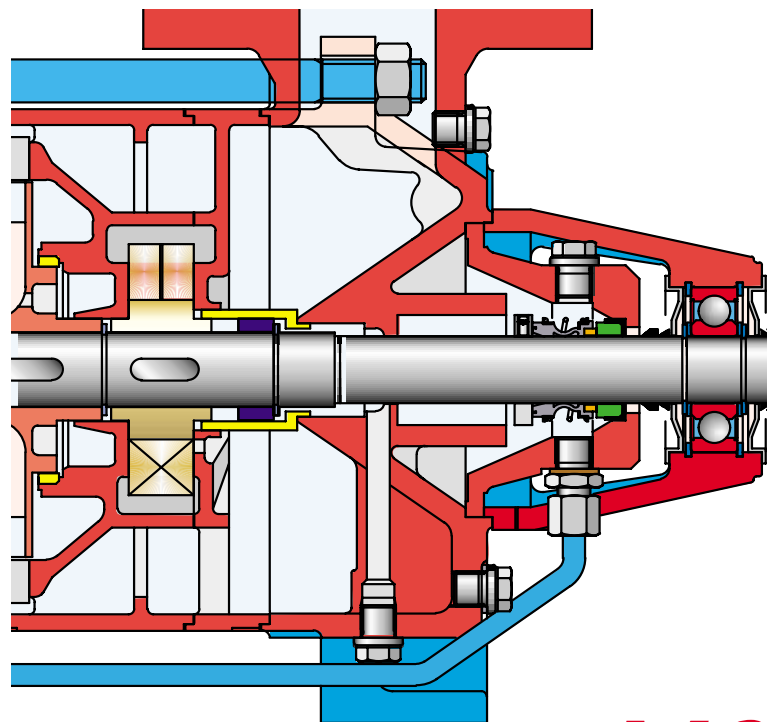

MC

Pump casings

- cast flanges on suction and pressure casing
- cast foot on MCV suction casing
- fitted with connections for pressure gauge, balance line, possible barrier liquid and drain
- *versatile casing design*
- *very rigid and durable construction*
- *exact positioning in pipework*

Suction cover

- with 2 anti-rotation vanes located in front of the first impeller
- *prevents for turbulence at impeller entry*
- *better NPSHr values*

Impellers

- closed impellers
- designed with 2 sealing edges and balance holes
- *better hydraulic performance*
- *axial forces reduced to a minimum*

Bearing

- axially mounted bearing
- *absorbing the remaining axial thrust*

Stage casings


- fitted with exchangeable wear rings
- with radial diffusors
- *longer pump life*
- *minimal radial forces resulting in a low vibration*

MCV connection

- pressure flange can be fitted in 4 ways
- *versatile connection possibilities*

MCV slide bearing

- lubricated by the pumped liquid
- fitted in the inlet casing
- *requires no maintenance*

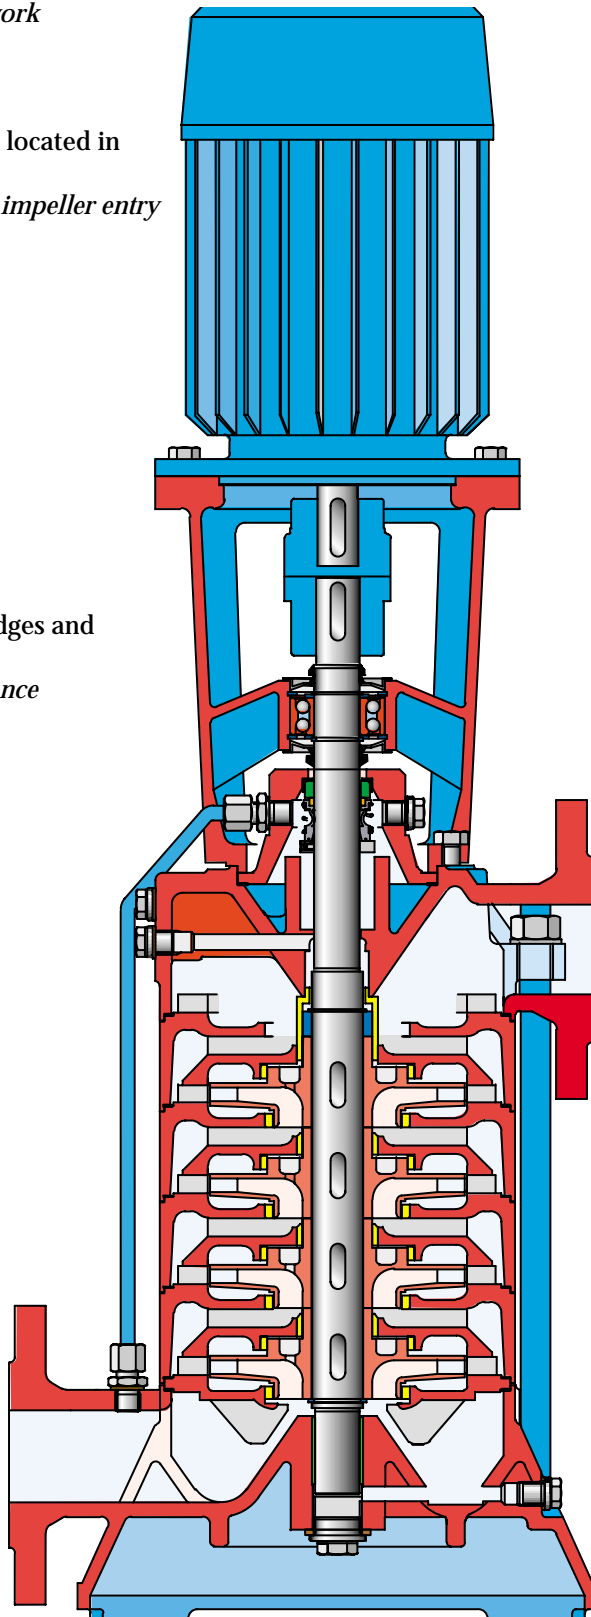




HZ

MCV

Shaft sealing




Shaft sealing is available in two variants:

- Standardized gland packing rings. When the pressure in the gland becomes too high the pumps are provided with a balance pipe. For the horizontal pump types a water cooled stuffing box is optional.
- Mechanical seal with bellows. Cooling and lubrication of this seal is achieved by circulation of the pumped liquid via a balance pipe.

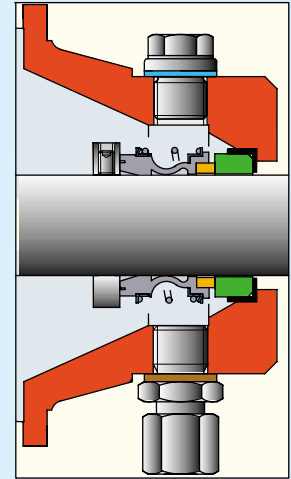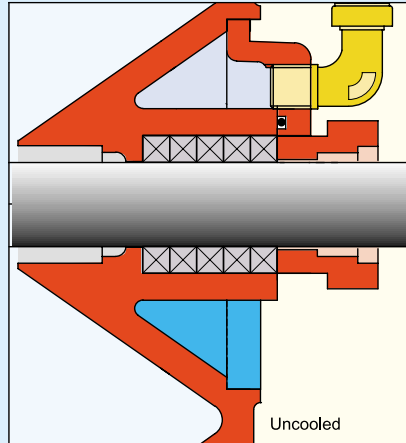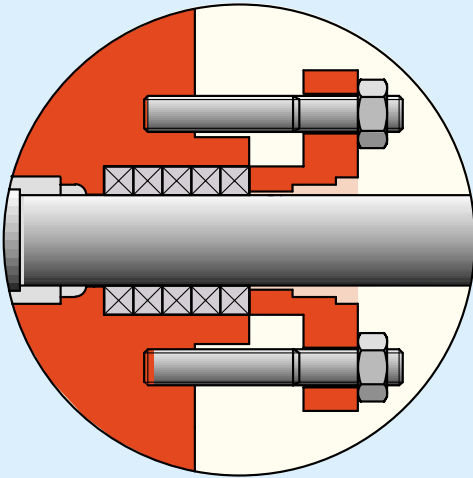

Bearing

- The horizontal pumps are designed with 2 deep-groove ball bearings. The largest types have a double-row angular contact bearing on pressure side. MCH 14 can be supplied with a reinforced bearing, consisting of 2 single-row angular contact bearings on pressure side. The bearing on pressure side is axially fixed.
- The vertical types are fitted with a double-row angular contact bearing which is axially fixed in the lantern piece. MCV 16 has a deep groove ball bearing.
- All bearings are grease-lubricated.
- In the suction casing the MCV types have a slide bearing, lubricated by the pumped liquid.

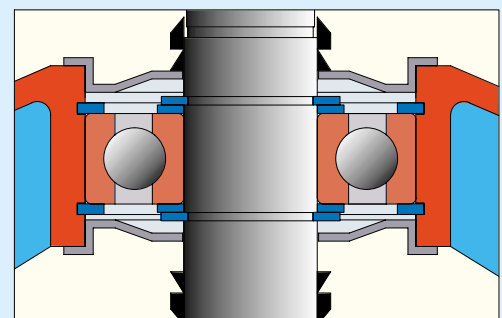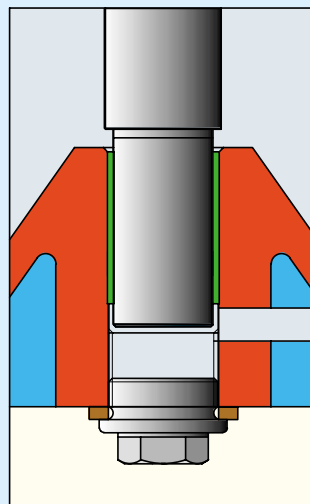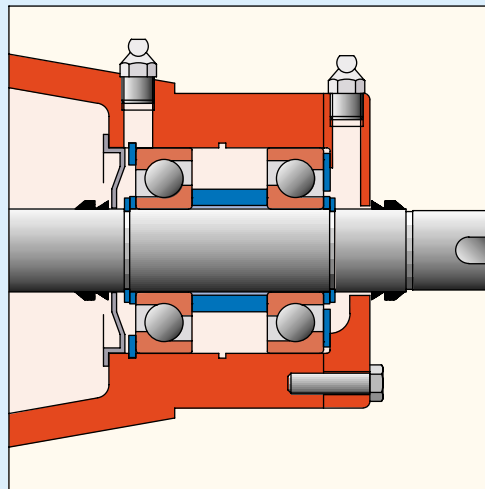


Technical data


Max . capacity	100 m ³ /h
Max. head	340 m
Max. working pressure	40- (3x inlet pressure) bar
Max. temperature	-20°C / +150°C
Max. speed	3600 rpm

Performance


— = limits MCV
— = limits MCH (MCHZ)
— = limits MCHZ

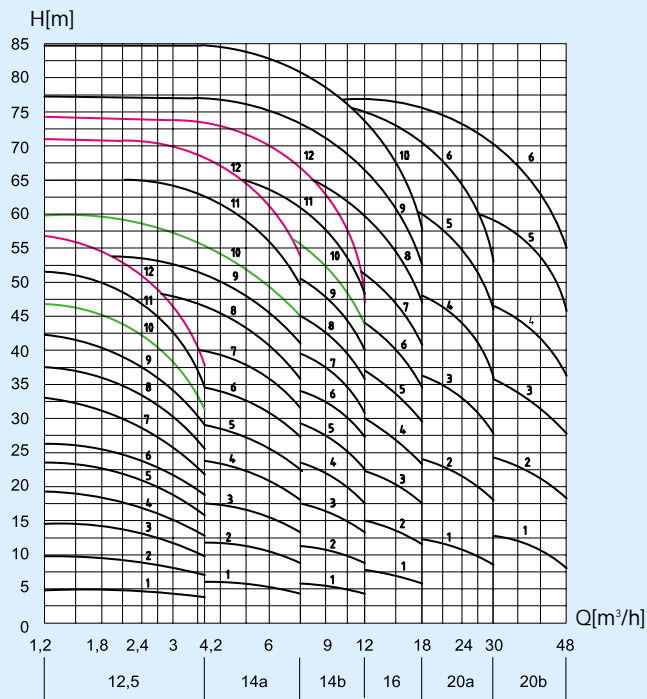


1500 rpm

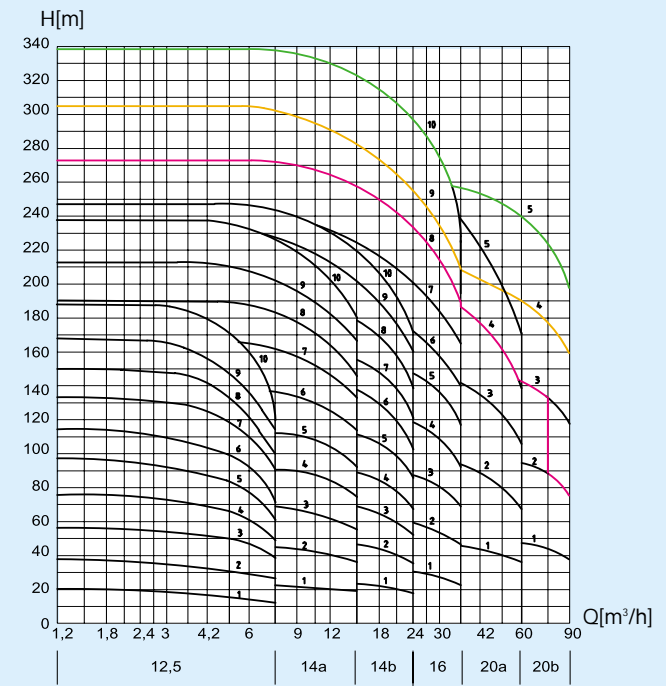

3000 rpm

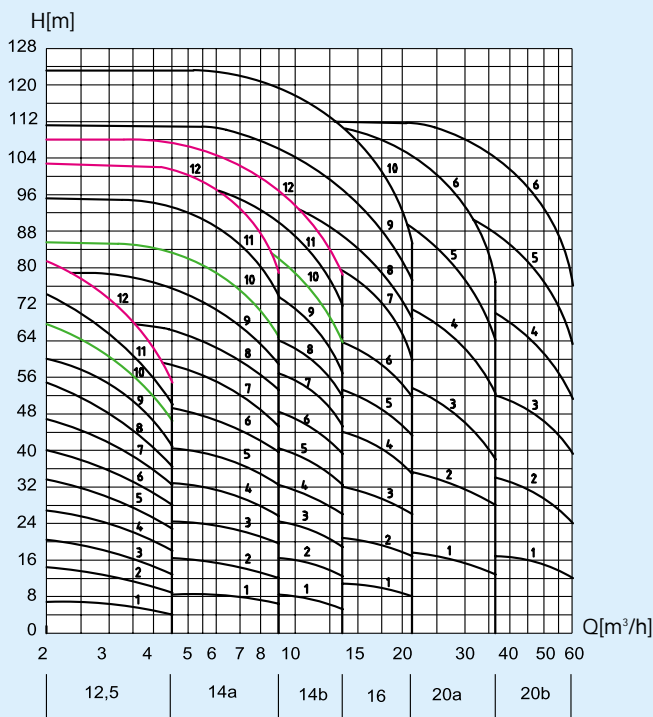

1800 rpm

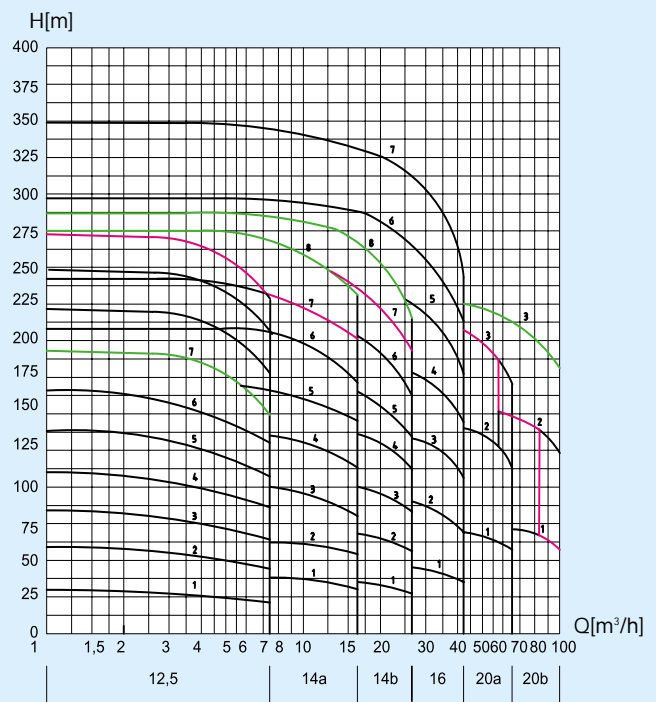

3600 rpm



Johnson Pump Group

Parent Company

SWEDEN

Johnson Pump AB
Nastagatan 19, P.O. Box 1436
SE-701 14 ÖREBRO
Tel. +46 (0)19 21 83 00
Fax +46 (0)19 27 23 30

National Sales Organisations

AUSTRALIA

Johnson Pump (Australia) Pty. Ltd.
P.O. Box 427
CANNON HILL, Qld. 4170
Tel. +61 (0)7 3899 9933
Fax +61 (0)7 3899 8574

BELGIUM

Johnson Pump Belgium N.V.
Steylsstraat 77
BE-1020 BRUSSELS
Tel. +32 (0)2 422 15 50
Fax +32 (0)2 422 15 59

DENMARK

Johnson Pumper A/S
Roskildevej 342 B
DK-2630 TÅSTRUP
Tel. +45 43 52 24 00
Fax +45 43 52 15 77

FINLAND

Johnson Pump Oy
Palotie 3, P.O. Box 59
FI-01610 VANTAA
Tel. +358 (0)9 348 3800
Fax +358 (0)9 348 38495

FRANCE

Johnson Pompes
240 rue Hélène Boucher, BP 131
FR-78531 BUC cedex
Tel. +33 (0)1 39 20 50 00
Fax +33 (0)1 39 56 54 22

GERMANY

Johnson Pumpen GmbH
In den Fichten 34
DE-32584 LÖHNE
Tel. +49 (0)5731 480 80
Fax +49 (0)5731 414 00

Sales Office:
Essen : Tel. +49 (0)201 23 70 66

ITALY

Johnson Pump Italiana S.r.l.
Via Torquato Tasso, 12
IT-20049 CONCOREZZO (Mi)
Tel. +39 039 604 14 63
Fax +39 039 604 90 97

NETHERLANDS

Johnson Pump Nederland
Dr. A.F. Philipsweg 51, P.O. Box 9
NL-9400 AA ASSEN
Tel. +31 (0)592 37 67 67
Fax +31 (0)592 37 67 60

Sales Office Horticulture:
De Lier: Tel. +31 (0)174 51 84 10
Fax +31 (0)174 51 84 44

NORWAY

Johnson Pump A/S
St. Halvardsgt. 33, P.O. Box 9378
Grønland, NO-0135 OSLO
Tel. +47 22 67 83 45
Fax +47 22 67 33 75

SPAIN

Johnson Pump España, S.L.
Ronda Monestir s/n, Apdo. 97
ES-17820 BANYOLES (Girona)
Tel. +34 972 58 08 01
Fax +34 972 58 08 03

Sales Office:
Madrid: Tel. +34 91 328 30 40

SWEDEN

Johnson Pump Orebro AB
Division Johnson Pump Svenska
Nastagatan 19, P.O. Box 1436
SE-701 14 ÖREBRO
Tel. +46 (0)19 27 13 50
Fax +46 (0)19 27 23 18

Sales Offices:
Göteborg: Tel. +46 (0)31 45 03 80
Stockholm: Tel. +46 (0)8 626 97 50

SWITZERLAND

Johnson Pumpen AG
Zugerstrasse 81, Postfach 304
CH-8820 WÄDENSWIL
Tel. +41 (0)1 780 90 92
Fax +41 (0)1 780 38 32

UNITED KINGDOM

JP Pumps Ltd.
Meadow Brook Industrial Centre
Maxwell Way, CRAWLEY
West Sussex RH10 2SA
Tel. +44 (0)1293 55 34 95
Fax +44 (0)1293 52 46 35

Northern Regional Office:
Bradford: Tel. +44 (0)1274 74 22 47
Fax +44 (0)1274 74 22 28

Joint Ventures

KENYA

Johnson Pump Kenya Ltd.
P.O. Box 20179
NAIROBI
Tel. +254 (0)2 556 751
Fax +254 (0)2 532 748

MALAYSIA

Johnson Pump (M) Sdn Bhd.
Plot 3102, Jalan BS 7/1
43300 SERI KEMBANGAN
Tel. +60 (0)3 8943 2300
Fax +60 (0)3 8943 6300

SOUTH AFRICA

Southern Pumps S.A. (Pty) Ltd.
P.O. Box 519
MILNERTON, 7945
Tel. +27 (0)21 551 24 90
Fax +27 (0)21 551 30 88

TANZANIA

Johnson Pump Tanzania Ltd.
P.O. Box 40349
DAR-ES-SALAAM
Tel. +255 (0)51 865 776
Fax +255 (0)51 865 775

ZIMBABWE

Johnson Pump Zimbabwe (Pvt) Ltd.
P.O. Box 139
HARARE
Tel. +263 (0)4 611 681
Fax +263 (0)4 611 680

Business Units

BELGIUM

Johnson Pump N.V.
Steylsstraat 75
BE-1020 BRUSSELS
Tel. +32 (0)2 422 16 16
Fax +32 (0)2 422 16 19

INDIA

Johnson Pump (India) Ltd.
Survey No. 320,
Odhav Road, Odhav,
AHMEDABAD 382 415
Tel. +91 (0)79 287 03 11
Fax +91 (0)79 287 25 22

NETHERLANDS

Johnson Pump B.V.
Dr. A.F. Philipsweg 51, P.O. Box 372
NL-9400 AJ ASSEN
Tel. +31 (0)592 37 67 00
Fax +31 (0)592 37 67 10

SWEDEN

Johnson Pump Orebro AB
Nastagatan 19, P.O. Box 1436
SE-701 14 ÖREBRO
Tel. +46 (0)19 21 83 00
Fax +46 (0)19 27 23 72

USA

Johnson Pumps of America, Inc.
10509 United Parkway
SCHILLER PARK, IL 60176
Tel. +1 847 671 7867
Fax +1 847 671 7909



In addition to our own companies we are represented by independent distributors in over 40 countries worldwide.

